


Sciencetech 2726A Buck Converter is a compact and user friendly learning platform which is very useful for students to understand the concept of PWM generation technique, and Buck Converter topology on various load configurations. It is also helpful for understanding the converter output on various filter configurations. Platform explains PWM generation technique, Buck converter operation, and power isolation circuit to measure the isolated output.

Features

- Optically isolated PWM generation with Gate driver
- Inbuilt isolation section for measurement of the signal
- Space provided for external inductor connection
- Test Points provided at output of each section to measure the signals

Scope of Learning

- To study PWM generation
- To study Buck Converter with different filter components and loads

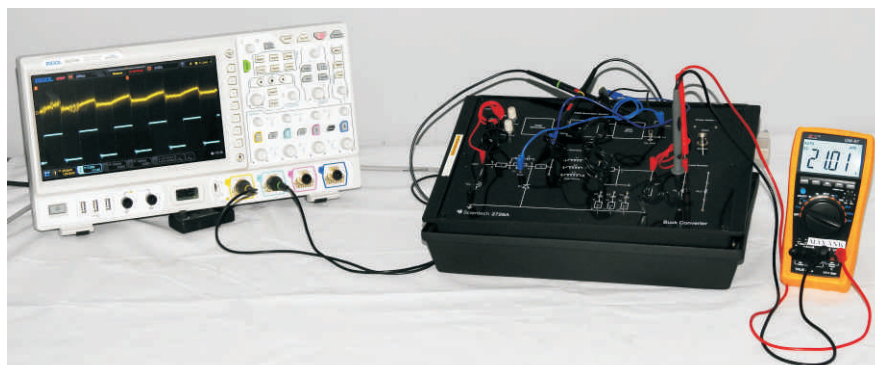

Technical Specifications

Input DC Voltage	:	24V/1A
PWM Frequency Variation	:	1KHz to 15 KHz (15-20KHz variable)
Duty Cycle Variation	:	10% to 80%
Load Assembly	:	RL1 & RL2 (75Ω & 25W)
Power Isolation Section	:	Single channel
Power device	:	IGBT TOSHIBA 20JT101
MOSFET/IGBT Driver	:	Single channel floating driver TLP250
Inductors	:	L1 (1.5mH), L2 (404uH), L3 (optional)
Test Points	:	16 nos.
Banana Socket insert 2mm	:	39 nos.
Product Tutorial	:	Online on www.SciencetechLearning.com
Dimensions (mm)	:	W 326 x D 252 x H 52
Power Supply	:	110V - 260V AC, 50/60Hz
Weight	:	1.5Kg (approximately)
Operating Conditions	:	0-40°C, 85% RH
Capacitors	:	C1 (100μF/63V) C2 (220μF/63V) C3 (1000μF/63V)
Included Accessories	:	2mm Patch Cord Red 14", 8"-3nos. 2mm Patch Cord Black 8"-6nos. 2mm Patch Cord Blue 16"-4nos. BNC to BNC Cable-1no. BNC to Test Probe-1no. Mains Cord-1no.