


MSA400 Series

Handheld Spectrum Analyzer

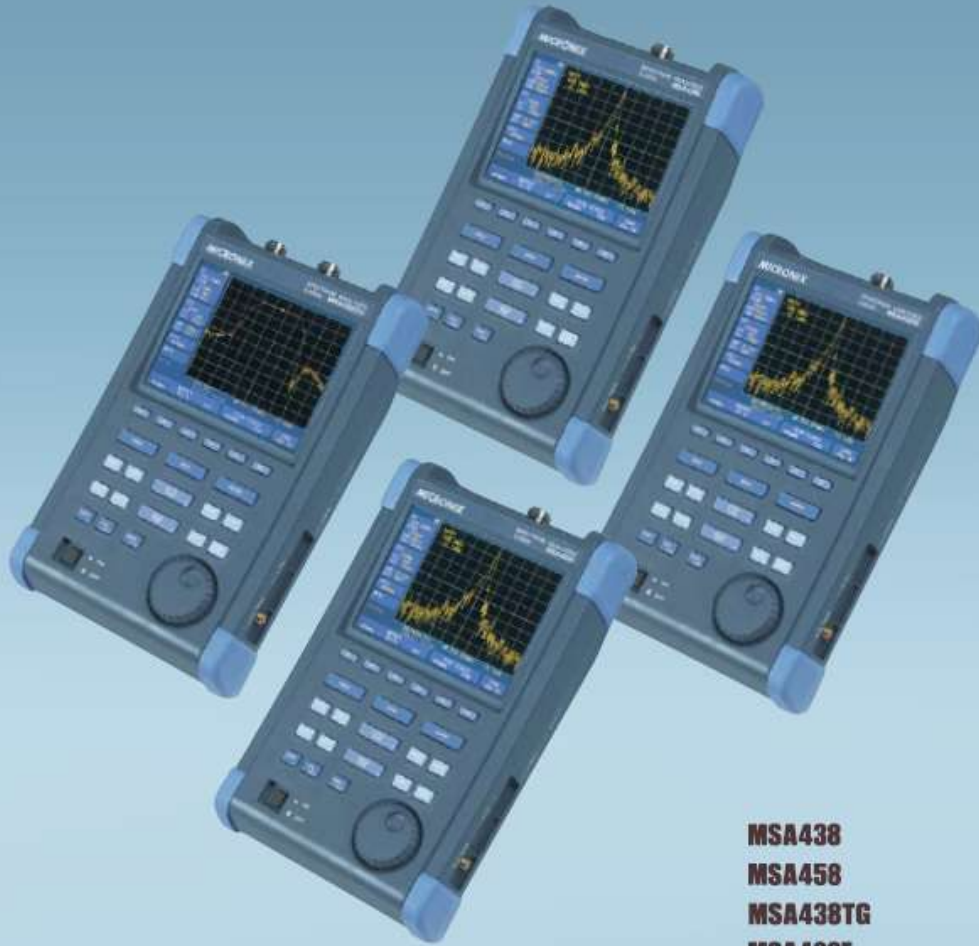

MSA438
MSA458
MSA438TG
MSA438E

MICRONIX

MSA400 Series

Handheld Spectrum Analyzer

Further upgrade of the handheld spectrum analyzer

MSA300 series was upgraded further.

MSA400 series is a definitive handheld spectrum analyzer

we can recommend to you with confidence.



Lineup of four models

Model	Contents
MSA438	50kHz to 3.3GHz The most popular model Applications Cellular phone, 2.4GHz wireless LAN, 2.5GHz WiMAX, RF-ID, Broadcasting
MSA458	50kHz to 8.5GHz Covering most of the wireless communication Applications 5GHz wireless LAN, 3.5/5.8GHz WiMAX, ETC/DSRC, Maintenance of wireless base station
MSA438TG	50kHz to 3.3GHz With 5MHz to 3.3GHz tracking generator Applications Frequency characteristics measurement of electronic component/circuit and return loss measurement
MSA438E	50kHz to 3.3GHz For EMI test Applications Radiated emission measurement and conducted emission measurement

Features of MSA400 series

1 Compact and lightweight 1.8kg

The dimensions are as small as 162(W)×71(H)×265(D)mm, and the weight is only 1.8kg including the battery. It is very convenient for outdoor use and on business trip.

2 Large and color TFT display

5.7 inches, 640×480 dots and color LCD

3 Four hours battery operation

Lithium-ion battery MB400 (option) fully charged enables about four-hour battery operation at minimum backlight brightness.

4 USB memory

USB memory can be used as a removable storage. The screen image is stored by BMP format, and the spectrum and the setting parameters are stored by CSV format.

5 USB communication

Such fast transfer rate as 12Mbps maximum was achieved by adoption of USB interface.

6 Accurate frequency measurement by PLL synthesizer

The center frequency is accurately set by PLL (Phase Locked Loop) synthesizer. Moreover, the frequency counter (factory option) enables to measure the frequency of the signal more accurately.

7 Average noise level -127dBm

The low average noise level of -127dBm @ 1GHz provides a wide dynamic range.

8 100dB display dynamic range

As the display scale in the amplitude axis is 100dB/10div (at 10dB/div), the signal is observed in a wide dynamic range.

9 Easy operation by AUTO mode

- By auto range operation, RBW, VBW and sweep time are automatically selected based on the frequency span.
- By auto tuning operation, the center frequency is adjusted to the maximum level within full span, and the optimum RBW, VBW and sweep time are chosen.

10 Competitive functions



- Measuring functions : Channel power, Adjacent channel power, Occupied bandwidth, Electric field strength, Magnetic field strength and Frequency measurement.
- Calculation functions : Max hold, Min hold, Averaging, Over write
- Marker measurement and peak search function
- Save/Load function
- Hard copy with printer

11 Abundant options

A lot of options such as PC software, Logging software, VSWR bridge, Dipole antenna, Magnetic field probe, USB printer, Frequency counter, Lithium-ion battery and Test accessories are available.

MSA400 Series

Handheld Spectrum Analyzer

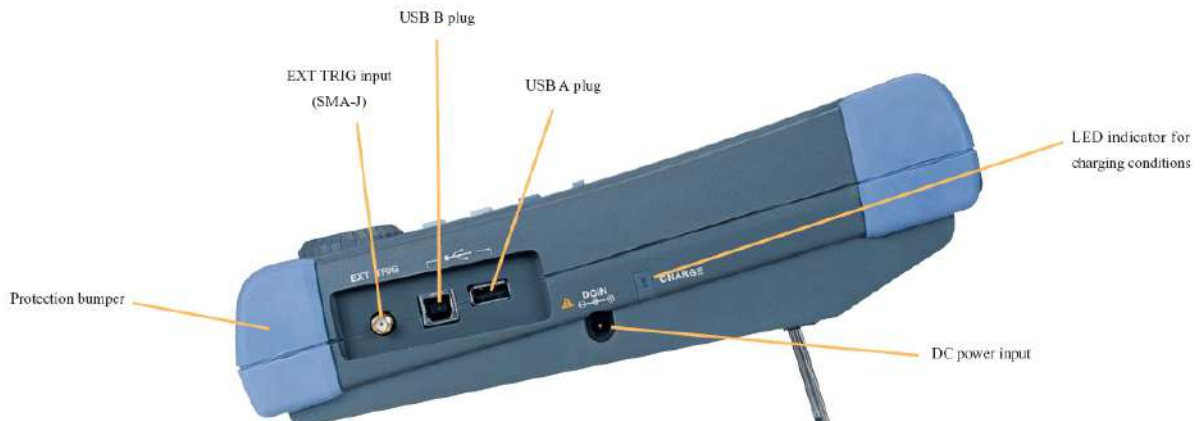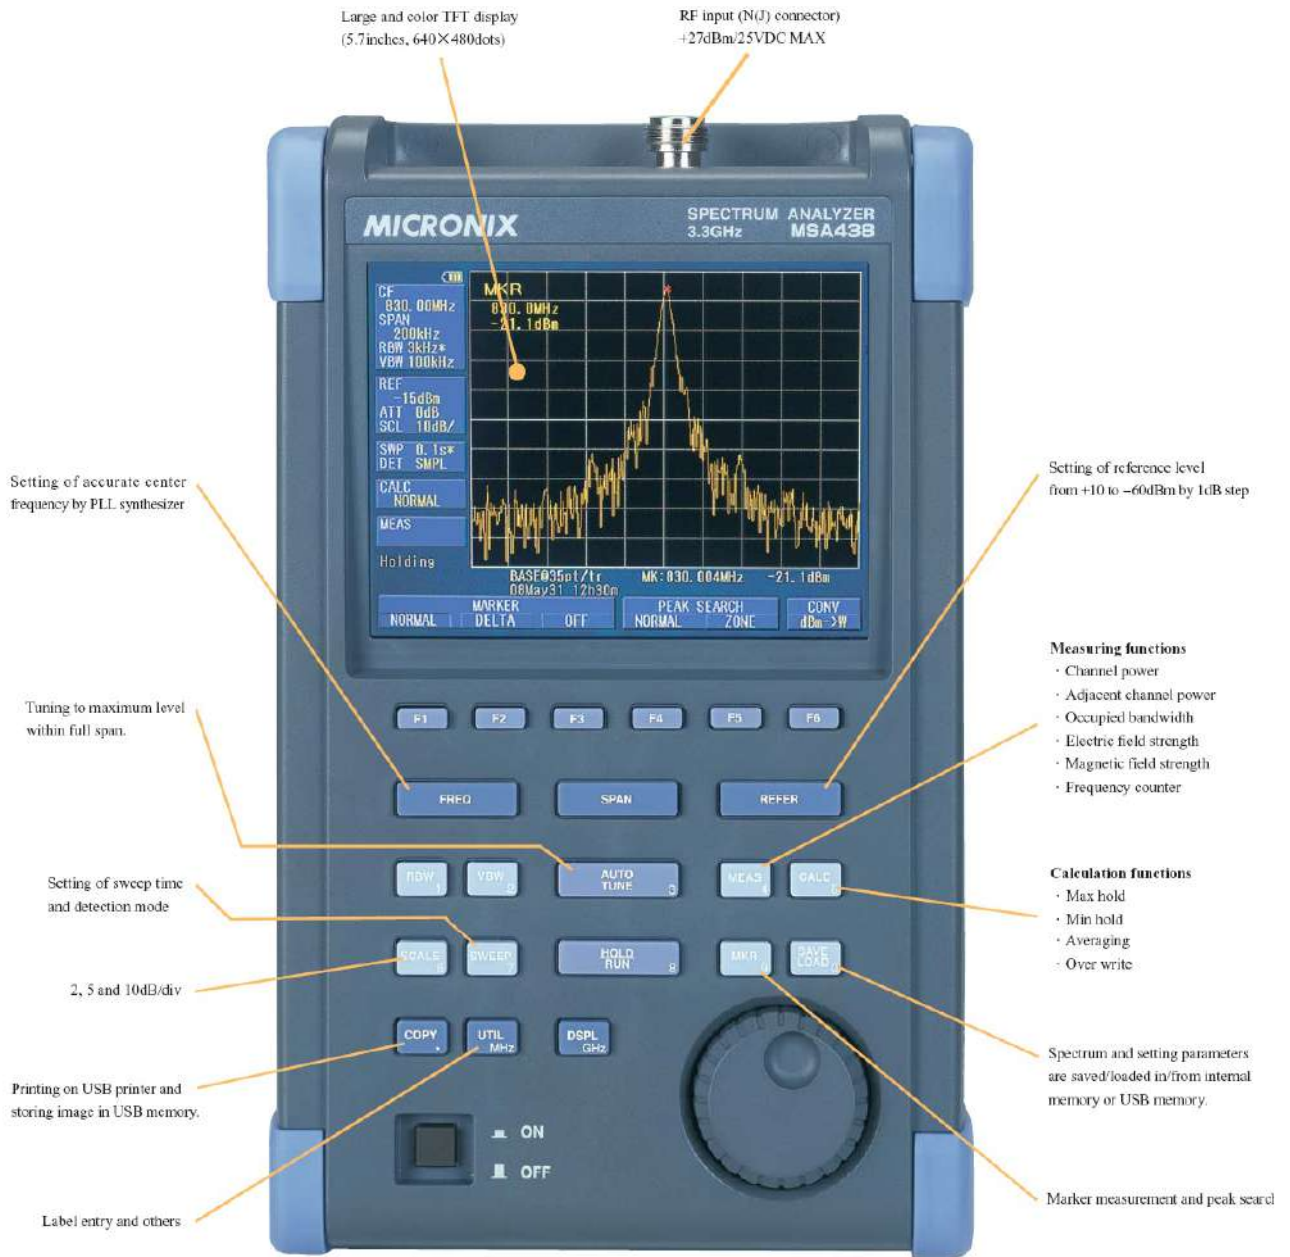


MSA400 Series

Handheld Spectrum Analyzer

Measuring functions


Channel power measurement

The sum of power in the band specified by band center and band width (colored area) is measured. In short, it is possible to measure the total power in the specified frequency band. Of course, this function enables to measure a noise power.




Adjacent channel power measurement

The adjacent channel leakage power is measured as the ratio of power in the range specified by offset frequency and bandwidth (colored area) to carrier power. Both of leakage power at the upper and lower side are measured. Furthermore, the method for measurement is selected out of three methods based on the classification of definition of carrier power; total power method, reference level method and in-band method.




Occupied bandwidth measurement

It is possible to measure the occupied frequency bandwidth defined as the width of points that are X (dB) lower than the peak level, or as the width of points at N(%) of the total power.



Electric field strength measurement


A dipole antenna (option) connected to the RF input enables the measurement of the electric field strength. According to the measuring frequency band, one antenna can be chosen from six kinds of antennas. M401 is mainly for PDC 800MHz and GSM 900MHz band, M402 is mainly for PDC 1500MHz band, M403 is mainly for PHS, W-CDMA and GSM 1800/1900MHz band, M404 is mainly for 2.4GHz wireless LAN and Bluetooth, M405 is mainly for 400MHz wireless, and M406 is mainly for 5GHz wireless LAN and 5.8GHz DSRC (ETC). M404 is capable of measuring direct sequence spread spectrum, frequency hopping and Bluetooth system because of 10ms sweep time and MAX HOLD function.

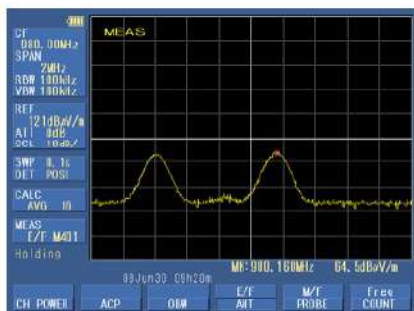

The conventional method covering the wide band with a single antenna results in low antenna gain because of using the range away from an antenna resonance point, and the dynamic range extremely worsens as a result. To use a resonance point where the antenna gain is high, six kinds of antennas are provided according to the frequency bands. Therefore, each antenna secures a wide dynamic range. Antennas of other bands will be also provided if requested.


Since the electric field strength is calibrated for each antenna in MSA400 series, it is possible to directly read the measured value.

Moreover, the electric field strength is also measured with an user's antenna besides antennas from M401 to M406 if "USER" antenna is selected.




Magnetic field strength measurement

MSA400 series measures precisely the magnetic field distribution on LSI or PCB using the magnetic field probe CP-2S (option). As the magnetic field detection portion of CP-2S is of a shielded loop structure using a glass ceramic multi-layer board technology with excellent high frequency characteristics, it enables the measurement with high reproducibility by detecting magnetic field components only. The measuring frequency range is as broad as 10MHz to 3GHz, and the measured value is calibrated in the instrument.

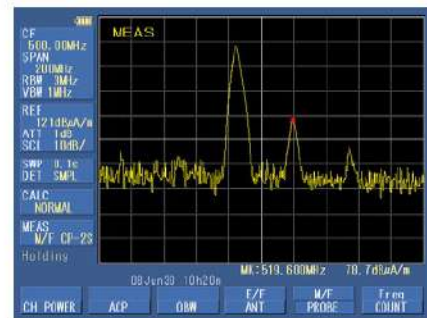

The typical applications of CP-2S are the evaluation of effectiveness of a bypass capacitor located at a power supply terminal of LSI and the evaluation of wiring rule of PCB. CP-2S is not affected by adjacent patterns because of high space resolution.

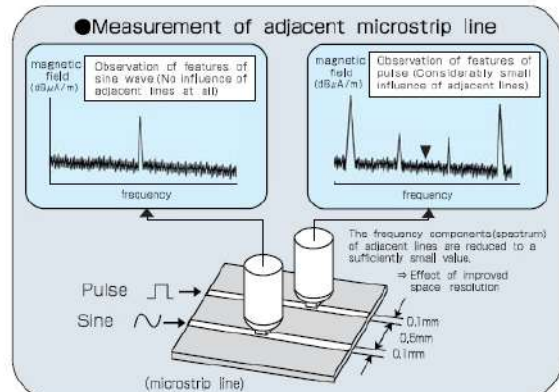


MSA400 Series

Handheld Spectrum Analyzer

Calculation functions

Max hold

The update spectrum data is compared with the data left last time at each point on X axis, and the larger one is retained and displayed. The number of times of the sweep can be set in the range from 2 to 1024 times by a power of 2, or by infinite. It is possible to observe a burst signal generated intermittently like a cellular phone and a frequency drift. In addition, this function is effective when the maximum level such as EMI test should be measured.

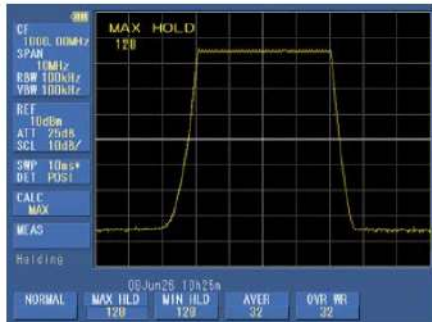


Min hold

The update spectrum data is compared with the data left last time at each point on X axis, and the smaller one is retained and displayed. The number of times of the sweep can be set in the range from 2 to 1024 times by a power of 2, or by infinite.


Averaging

The simple averaging processing is executed at each sweep. The number of times of the averaging can be set in the range from 2 to 1024 times by a power of 2. Even the spectrum buried in noise is observed.

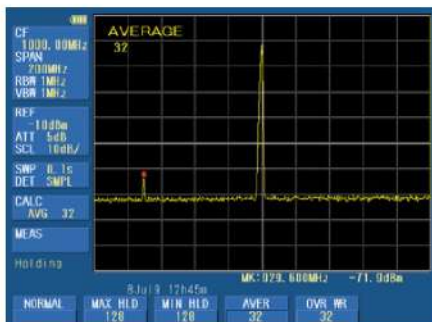

Over write


The image on the screen is not cleared at each sweep, and the overwriting display is executed. The number of times of overwriting can be set in the range from 2 to 1024 times by a power of 2, or by infinite. This function is, therefore, convenient for observing a process of changes of the signal. Moreover, it is effective for observing a signal occasionally generated.

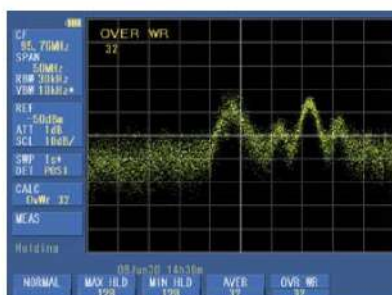

Marker and peak search


Marker measurement

Two different modes are available for the marker measurement. One is the normal marker mode to calculate and display the frequency (maximum effective digits: 8) and the level (maximum effective digits: 4) at marker point. And another is the delta marker mode to calculate and display the frequency difference and the level difference between two markers (one of which is the reference marker).

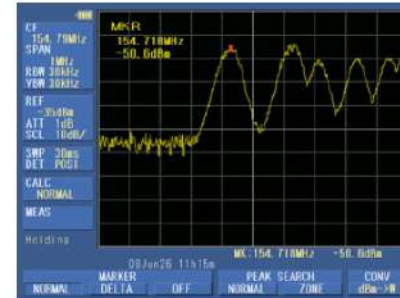


Normal marker measurement

Delta marker measurement

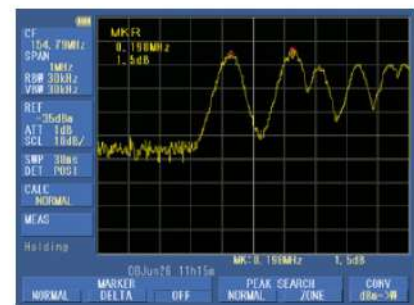


Peak search

Two different modes are available for the peak search. One is the normal peak search mode to search for a peak level within all of 10div of the frequency axis as the search range. And another is the zone peak search mode to search for a peak level in the range specified by the center value and width. At the normal mode, the marker moves to a peak level only when the search key is pushed, but at the zone mode, it follows to a peak level at each sweep. In addition, the NEXT search to search for the next smaller level is permitted in the normal peak search mode.

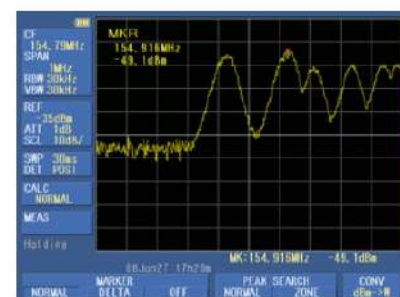

Normal peak search

Zone peak search

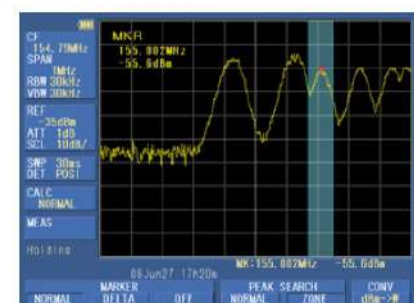

MSA400 Series

Handheld Spectrum Analyzer

Storage of measurement data

The following four methods allow you to store the spectrum and the setting parameters. The storage data is easily managed because the label or the file name is attached to the collected data.

• Label function

The named label is displayed in the label area on the screen. As for the characters, four kinds of numerals (0 to 9), small letter alphabet (a to z), capital letter alphabet (A to Z) and marks (@, #, ! and etc.) are available. The number of characters is 16 or less.

Label example : BASE352acp8 (refer to screen in next item)

This label is useful as a comment sentence in case of storing the screen image by BMP format in USB memory, or printing on the printer. Furthermore, it is used as a part of the file name at SAVE/LOAD function.


Storage into USB memory

The storage into USB memory is executed with **SAVE/LOAD** key or **COPY** key.



• Storage with **SAVE/LOAD** key

1000 data or less are stored in USB memory by CSV format. The storage data is managed by the file name as shown below, and the file name is displayed in the active area on the screen when pushing **SAVE/LOAD** key.

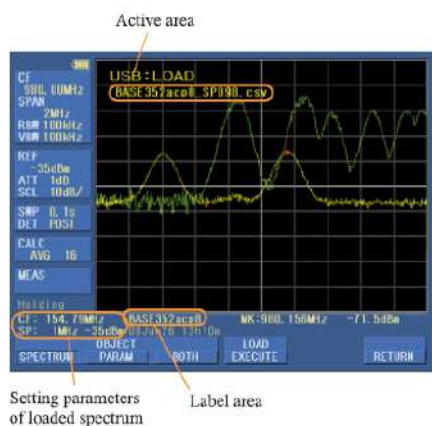

File name : BASE352acp8 _ SP 098
① ② ③

- ① The named label is pasted.
- ② The kind of storage data chosen is attached.
S : spectrum, P : setting parameters, SP : both
- ③ The consecutive number is automatically attached only to the same label name.

Only one spectrum is loaded on the screen, and at the same time the setting parameters attached to the spectrum are displayed on the screen.

• Storage with **COPY** key



The number of storage data is not limited and depends only on the capacity of USB memory. The whole screen image (excluding function menu) or the spectrum can be selected, and it is stored by BMP format. This storage data cannot be loaded on the screen of MSA400 series. Besides, it is possible to transfer the storage data in the internal memory to USB memory in a lump sum.

Storage into internal memory

The operation of **SAVE**, **LOAD** or **DELETE** is achieved in the same way as "Storage with **SAVE/LOAD** key" in the item of USB memory. However, the number of storage data is limited to 200 data or less.

Print on printer


The MSA400 series enables a hard copy of the screen by connecting USB printer (option) to USB A plug with USB cable MI400 (option). Comes into the print mode when pushing **COPY** key. Since the printer corresponds to two kinds of power supplies of dedicated AC adaptor and dry battery, the hard copy of the screen image is easily accomplished even in the open where there is no AC power supply. The dry battery allows the hard copy of almost 140 images.

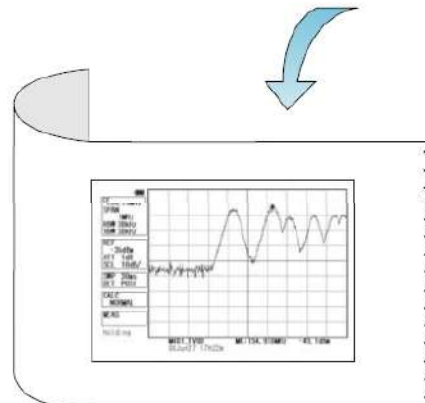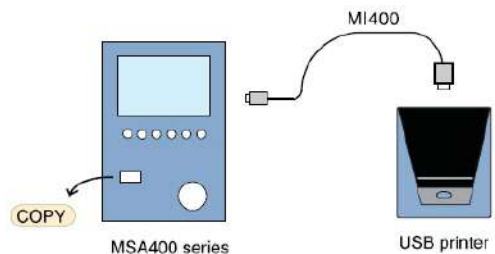

Storage with PC software and Logging software

It is possible to store the data in the PC by using PC software MAS400 (option), which enables to set the setting parameters with the PC and display the spectrum on the PC screen.

In addition, Logging software MAS410 (option) makes it possible to collect the data by uninhabited for a long time and store them.

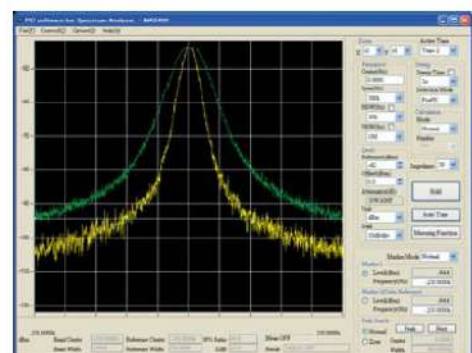


MSA400 Series

Handheld Spectrum Analyzer

Auto tuning

When pushing **AUTO TUNE** key, the spectrum with the maximum level is searched within full span (3.3GHz @ MSA438/438TG/438E and 8.5GHz @ MSA458), and then it is adjusted to the center of the screen. That spectrum is displayed on the screen at the specified frequency span, and at reference level, resolution bandwidth, video bandwidth and sweep time that are automatically set to the optimum parameters based on the span.

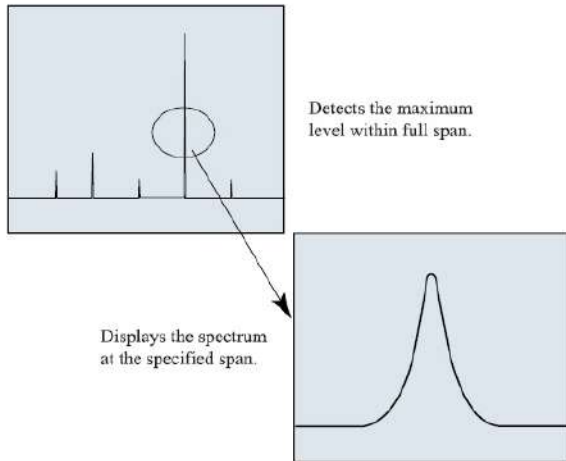

Battery operation

Almost four hours battery operation has been achieved without enlarging the main body by adopting a lithium-ion battery (MB400, option) as a built-in battery. The battery is easily installed or removed because the cover is removed by hand without any tool.

In addition, the battery remainder is divided into five levels and displayed on the screen.

- Battery charge

The time from empty state to full charge is only almost four hours because each model is equipped with the rapid charging circuit.

Under the conditions of power-off and connecting the AC adaptor MA400 of a standard accessory, the battery is charged. The charging conditions are indicated by two colors LED on the right side as shown in the table below.

Charging condition	Color of LED
On charge	red
Completion of charge	green
No battery	green
Abnormal	blinking in red

※ LED is turned off at power-on.

The abnormal condition means that the charging time is more than the time decided beforehand, or that the battery voltage becomes too high.

Easy operation by AUTO mode


Resolution bandwidth, video bandwidth and sweep time are set automatically based on the specified frequency span. Furthermore, it is also possible to automatically set one or two parameters of either resolution bandwidth, video bandwidth or sweep time.

The operator is released from troublesome operation because these three parameters accompanying the frequency span are set automatically.

Moreover, the input attenuator and the IF amplifier are automatically set to the optimum values based on the reference level.

Precise frequency measurement

- The center frequency is precisely set by PLL (Phase Locked Loop) synthesizer. The setting resolution is 20kHz.

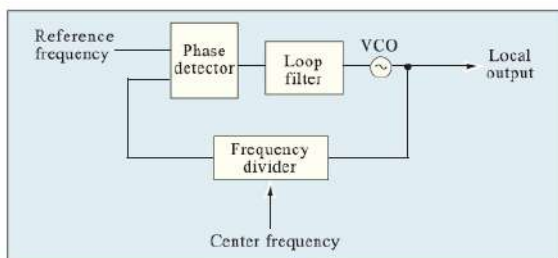

- The frequency counter (factory option) enables you to measure the frequency of input signal more accurately. The frequency is measured by 100Hz resolution and 8 digits or less. The frequency accuracy of the reference crystal oscillator is $\pm 2\text{ppm}$ @ 23°C and the measuring frequency range is from 1MHz to the maximum measuring frequency of each model.

MSA400 Series

Handheld Spectrum Analyzer

with Tracking Generator

MSA438TG



MVS300

The tracking generator is a signal source which generates the sine wave synchronized with the sweep of the spectrum analyzer.


For example, the tracking generator outputs 1MHz sine wave when the spectrum analyzer is at 1MHz sweep point. The 1GHz is output at 1GHz sweep point as well. Therefore, the amplitude frequency characteristics of various electronic components and circuits can be observed on the screen without any troublesome operation.

Moreover, the VSWR bridge MVS300(option) enables to measure the return loss.


Frequency response of filter

The input and the output of a filter are connected to TG OUT and RF IN respectively. The frequency response of a filter is observed in the range of 5MHz to 3.3GHz.

The frequency response of the coaxial cable and MSA438TG is made flat by using the NORMALIZING function.

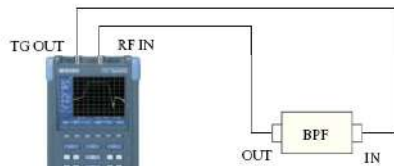


MSA438TG

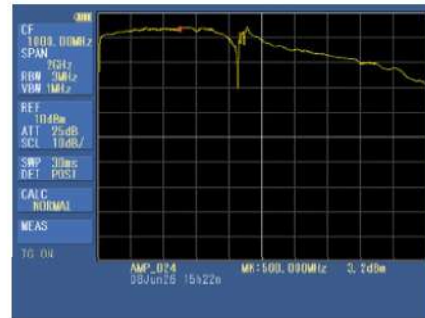

Return loss measurement

VSWR bridge MVS300 (option) connected to TG OUT and RF IN of MSA438TG enables the return loss measurement. The measured frequency range is from 5MHz to 3GHz.


Additionally, the calibration of the return loss 0dB is done by using the NORMALIZING function.

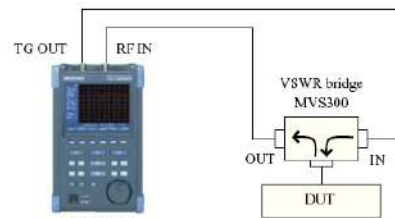


MSA438TG

Gain characteristics of amplifier

The frequency response of an active circuit such as an amplifier besides a passive circuit such as LC filter is measured. A measurement example of the gain-frequency characteristics of an amplifier is shown in the figure below. The level of TG OUT is -10dBm.

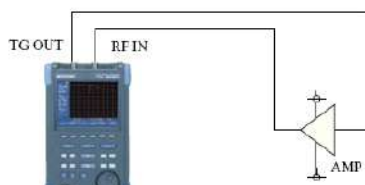

MSA438TG

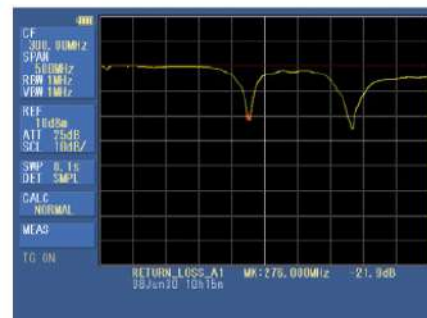


MSA400 Series

Handheld Spectrum Analyzer

Option

PC software MAS400

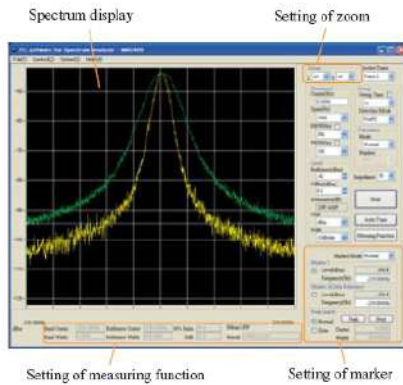

MAS400 is a software that controls the spectrum analyzers of four models by the PC. 1001 points are captured in the spectrum analyzer. Although 501 points are displayed on its screen, the number of points transferred to the PC is all of 1001 points.


The screen image is stored by BMP format and the spectrum is stored by CSV format each point (frequency and level).

Logging software MAS410


MAS410 is a logging software that collects the measurement data by uninhabited. It is optimum for watching an abnormal signal at night and recording the data by uninhabited for a long time.

- Logging at specified frequency band, sampling interval and measurement time.
- Makes it possible to fast-forward and fast-rewind the images in the file like a video recorder, and moreover, to jump to the image with spectrum exceeding the limit line.
- ERROR is automatically displayed when the signal exceeding the limit line is input.

Recording

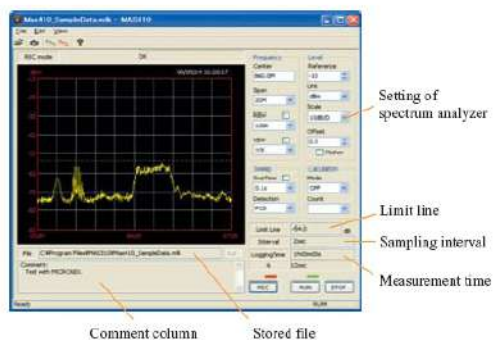

Playback

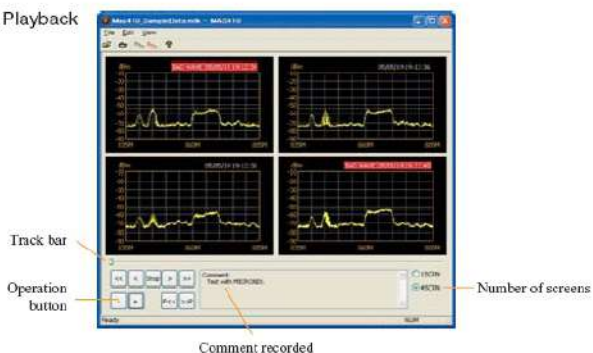

VSWR bridge MVS300



Frequency range : 5 to 3000MHz
 Directivity : more than 40dB @ 50 to 3000MHz
 more than 25dB @ 5 to 50MHz
 Insertion loss :
 less than 7dB @ SOURCE to DUT
 less than 8dB @ DUT to REFLECTED
 Dimensions : 50(W)×31(H)×114(D)mm
 Weight : approx.240g
 Connectors : SMA(J) (for three ports)

Dipole antenna M401 to M406



Model	Freq.range	Antenna gain	VSWR	Dimensions	Weight
M401	0.8 to 1GHz	>1dBi	<1.5	7.5φ×280mm	approx.58g
M402	1.25 to 1.65GHz	>1dBi	<1.5	7.5φ×280mm	approx.60g
M403	1.7 to 2.2GHz	>1dBi	<1.5	7.5φ×210mm	approx.58g
M404	2.25 to 2.65GHz	>1dBi	<1.5	7.5φ×210mm	approx.56g
M405	300 to 500MHz	>1dBi	<1.5	8.0φ×212mm	approx.62g
M406	4.7 to 6.2GHz	>1dBi	<1.5	7.5φ×152mm	approx.54g

- Antenna gain and VSWR are specified at a center of frequency range.
- Connector : N(P)

Magnetic field probe CP-2S



Frequency range : 10MHz to 3GHz
 Space resolution : approx.0.25mm
 (depending on objects)
 Dimensions : outside 12φ×135mm
 probe tip 2mm(W)×1mm(T)
 Connector : SMA(P)

USB printer



Printing method : Thermal line dot method
 Paper : 80mm width thermal paper
 Power source :
 internal : AA-sized alkaline battery (4 pcs)
 external : 7.5VDC/3A (dedicated AC adapter)
 Dimensions : 134(W)×60(H)×180(D)mm
 Weight : approx.450g (mainframe only)
 Interface : USB 2.0

※ Option : Rollpaper (10 rolls)

MSA400 Series

Handheld Spectrum Analyzer

Frequency counter (factory option)

Items	Specifications
Freq.range	1MHz to 3.3GHz@MSA438/438TG/438E 1MHz to 8.5GHz@MSA458
Measured level	+10 to -70dBm@1MHz to 2GHz, RBW100kHz +10 to -60dBm@2GHz to 8.5GHz, RBW100kHz
Measurement resolution	100Hz
Display digits	8 digits max
Reference x'tal	Accuracy : $\pm 2\text{ppm}@23^{\circ}\text{C}$ Temp.characteristics : $\pm 5\text{ppm}@0\text{ to }40^{\circ}\text{C}$

Lithium-ion battery MB400



7.4V/5000mAh

Coaxial attenuator MG-XXdB

Model	Attenuation error		V S W R	Rated power
	DC to 12.4GHz	12.4GHz to 18GHz		
MG-1dB, 2dB, 3dB, 4dB	$< \pm 0.5\text{dB}$	$< \pm 1\text{dB}$	$< 1.15@DC\text{ to }4\text{GHz}$	1W
MG-5dB, 6dB, 7dB, 8dB	$< \pm 0.7\text{dB}$	$< \pm 1.2\text{dB}$	$< 1.2@4\text{ to }12.4\text{GHz}$	
MG-9dB, 10dB, 12dB, 13dB	$< \pm 1.0\text{dB}$	$< \pm 1.25\text{dB}$	$< 1.3@12.4\text{ to }18\text{GHz}$	
MG-14dB, 15dB, 20dB	$< \pm 1.2\text{dB}$	$< \pm 1.3\text{dB}$	$< 1.2@DC\text{ to }8\text{GHz}$	
MG-30dB	$< \pm 1.2\text{dB}@DC\text{ to }8\text{GHz}$			

※Connector, impedance : SMA(P)/SMA(J), 50 Ω

Terminator

Model	Freq.range	V S W R				Rated power	Connector
		DC to 4GHz	4 to 8GHz	8 to 12.4GHz	12.4 to 18GHz		
MG-50S	DC to 18GHz	< 1.08	< 1.10	< 1.15	< 1.20	0.25W	SMA(P)
MG-50N	DC to 8GHz	$< 1.2@DC\text{ to }8\text{GHz}$				2W	N(P)

※Impedance : 50 Ω

Coaxial cable

Model	Connector	Length	Freq.range
MC102	SMA(P)/BNC(P)	1.5m	DC to 2GHz
MC201	SMA(P)/SMA(P)	0.5m	DC to 18.5GHz
MC202	SMA(P)/SMA(P)	3m	DC to 18.5GHz
MC203	SMA(P)/SMA(P)	4m	DC to 18.5GHz
MC204	SMA(P)/SMA(P)	1.5m	DC to 12.4GHz
MC301	SMA(P)/SMA(P)	0.5m	DC to 10GHz
MC302	SMA(P)/SMA(P)	1m	DC to 10GHz
MC303	SMA(P)/SMA(P)	1.5m	DC to 10GHz
MC304	SMA(P)/N(J)	0.2m	DC to 4GHz
MC305	SMA(P)/N(P)	0.2m	DC to 4GHz
MC306	SMA(P)/BNC(J)	0.2m	DC to 2GHz
MC307	SMA(P)/BNC(P)	0.2m	DC to 2GHz
MC308	N(P)/N(P)	0.5m	DC to 10GHz
MC309	N(P)/N(P)	1m	DC to 10GHz
MC310	N(P)/N(P)	1.5m	DC to 10GHz
MC311	N(P)/SMA(J)	0.2m	DC to 10GHz
MC312	N(P)/BNC(J)	0.2m	DC to 2GHz
MC313	N(P)/BNC(P)	0.2m	DC to 2GHz
MC314	BNC(P)/BNC(P)	1.5m	DC to 2GHz

※Impedance : 50 Ω

Adapter

Model	Connector	Impedance	Freq.range
MA301	BNC(P)/BNC(J)	50 Ω /75 Ω	DC to 2GHz
MA302	BNC(P)/N(J)	75 Ω /75 Ω	DC to 1.8GHz
MA303	BNC(P)/N(P)	75 Ω /75 Ω	DC to 1.8GHz
MA304	BNC(P)/F(J)	75 Ω /75 Ω	DC to 1.8GHz
MA305	BNC(P)/F(P)	75 Ω /75 Ω	DC to 1.8GHz
MA306	N(P)/SMA(J)	50 Ω /50 Ω	DC to 12.4GHz
MA307	N(P)/BNC(J)	50 Ω /50 Ω	DC to 2GHz
MA308	N(P)/BNC(J)	50 Ω /75 Ω	DC to 2GHz
MA309	N(J)/BNC(P)	50 Ω /50 Ω	DC to 2GHz

USB cable MI400



Connector : A plug/B plug
Length : 1m

MSA400 Series

Handheld Spectrum Analyzer

Specifications

Frequency section

Frequency range	50kHz to 3.3GHz (MSA438/438TG/438E) 50kHz to 8.5GHz (MSA458)
Center frequency	
Setting resolution	20kHz
Accuracy	Allows rotary encoder, numeric key and function key. $\pm(30+20T)kHz \pm 1 \text{ dot}$ @ Span $\leq 10\text{MHz}$, RBW3kHz, $\times 1$ $\pm(60+300T)kHz \pm 1 \text{ dot}$ @ Span $\geq 20\text{MHz}$, RBW100kHz, $\times 1$
RBW freq. error	$\pm 4\text{kHz}$ @ 3kHz, 10kHz, 30kHz RBW $\pm 20\%$ @ 100kHz, 300kHz RBW $\pm 10\%$ @ 1MHz, 3MHz
Frequency span	
Setting range	$\langle \text{MSA438/438TG/438E} \rangle$ 0Hz (zero span), 200kHz to 2GHz (1-2-5 step) and 3.3GHz (full span) $\langle \text{MSA458} \rangle$ 0Hz (zero span), 200kHz to 5GHz (1-2-5 step) and 8.5GHz (full span)
Accuracy	$\pm 3\% \pm 1 \text{ dot}$ @ one step slower sweep time than AUTO, $\times 1$
Display dots	501 dots @ LCD screen, 1001 dots @ USB communication $\times 1001$ dots are captured in the unit.
Resolution bandwidth	3dB bandwidth
Setting range	$\langle \text{MSA438/458/438TG} \rangle$ 3kHz to 3MHz (1-3 step) and AUTO $\langle \text{MSA438E} \rangle$ 3k, 9k (6dB), 30k, 120k (6dB), 300k, 1M, 3MHz and AUTO
Accuracy	$\pm 20\%$
Selectivity	1:12 (typical) @ 3dB:60dB
Video bandwidth	100Hz to 1MHz (1-3 step) and AUTO
SSB phase noise	-90dBc/Hz (typical) @ 100kHz offset, RBW 3kHz, VBW 100Hz, sweep time 1s
Spurious response	less than -60dBc
Harmonics	less than -40dBc @ $\geq 100\text{MHz}$

Amplitude section

Reference level	
Setting range	+10 to -60dBm , 1dB step
Accuracy	$\pm 0.8\text{dB} \pm 1 \text{ dot}$ @ CF100MHz, RBW3MHz, VBW 1MHz, REF -15dBm , $\times 1$
Unit	dBm, dBV, dBmV, dB μ V, dB μ V/m, dB μ A/m
Average noise level	-127dBm (typical) @ 1GHz
Frequency characteristics	$\pm 2.0\text{dB} \pm 1 \text{ dot}$ @ $< 100\text{MHz}$ $\pm 1.0\text{dB} \pm 1 \text{ dot}$ @ $\geq 100\text{MHz}$
Input impedance	50 Ω
Input VSWR	less than 2.0
Input attenuator	
Operating range	0 to 25dB (1dB step), coupled with reference level
Switching error	$\pm 0.6\text{dB}$ @ 100MHz
RBW switching error	$\pm 0.6\text{dB}$
Display scale	
Display dots	381 dots/10div
Scale	2dB/div, 5dB/div, 10dB/div $\pm(0.2\text{dB}+1 \text{ dot})/2\text{dB}$ $\pm(0.4\text{dB}+1 \text{ dot})/5\text{dB}$ $\pm(0.8\text{dB}+1 \text{ dot})/10\text{dB}$ $\pm(1.8\text{dB}+1 \text{ dot})/83\text{dB}$
Accuracy	$\pm 27\text{dBm}$ (CW average power), 25VDC
Input damage level	
Input connector	N(J) connector

Sweep section

Sweep time	
Setting range	10ms to 30s (1-3 step, Span 0 to 2GHz) and AUTO 30ms to 30s (1-3 step, Span 5GHz @ MSA458 and full) and
AUTO	
Accuracy	$\pm 0.1\% \pm 1 \text{ dot}$ @ Span 0 to 5GHz $\pm 2.5\% \pm 1 \text{ dot}$ @ Full span
Trigger	Available only for zero span
Trigger mode	AUTO
Trigger source	Internal and External
External trigger	
Voltage range	1 to 10Vp-p
Frequency range	DC to 5MHz
Input coupling	DC coupling
Trigger level	approx. 0.56V (fix)
Input RC	approx. 10k Ω // less than 15pF
Input damage level	$\pm 50\text{V}$ (DC+AC peak)
Input connector	SMA(J) connector
Detection mode	Positive peak, Negative peak, Sample

T : sweep time (s), $\times 1$: 23 \pm 5 $^{\circ}\text{C}$, less than 28 $^{\circ}\text{C}/70\%\text{RH}$

MICRONIX Corporation reserves the right to make changes in design, specification and other information without prior notice.

Functions

Marker measurement	NORM : displays frequency (8digits max) and level (4digits max) at marker point. DELTA : displays frequency difference and level difference between two markers.
Peak search function	Searches for peak level within all of 10 div (NORM mode) or within ZONE specified (ZONE mode) and displays frequency and level at peak level, and moreover NEXT peak at NORM mode.
Calculation function	NORM, MAX HOLD, MIN HOLD, AVERAGE, OVER
WRITE	Number of sweeps is 2 to 1024 (power of 2) and infinite.
Measuring function	Channel power, Adjacent channel power, Occupied
bandwidth,	Electric field strength (needs optional dipole
antenna), Magnetic	field strength (needs optional magnetic field
probe) and Frequency	counter (factory option)
Auto tuning	When pressing AUTO TUNE key, the spectrum of maximum
level	within full span is adjusted to center, and reference level,
RBW,	VBW and sweep time are set to optimum parameters.
Save/ Load	
Save	Saves 200 spectrums and 200 setting parameters.

Tracking generator (only MSA438TG)

Frequency range	5MHz to 3.3GHz
Output level	$-10\text{dBm} \pm 1 \text{ dB}$ @ 1GHz
Output level flatness	$\pm 1.5\text{dB}$
Normalizing function	Compensates input frequency response flat on screen.
Output impedance	50 Ω
Output VSWR	less than 2.0
Output connector	N(J) connector

EMI measurement function (only MSA438E)

Detection mode	PK (peak), QP (quasi peak) and AV (average) detections
Resolution bandwidth	3kHz, 9kHz (6dB), 30kHz, 120kHz (6dB), 300kHz, 1MHz, 3MHz $\times 3\text{dB}$ bandwidth excluding 9kHz and 120kHz.

Time constant of QP

Time constant	RBW	9kHz	120kHz
	Charge	1ms	1ms
Discharge	160ms	550ms	

General

Communication	
Interface	Corresponding to USB 2.0
Connector	B plug (device)
Transfer rate	Full speed (12Mbps)
Hard copy	USB printer (option) connected to A plug (host) enables hard copy of screen.
USB memory	Uses A plug (host), and stores spectrum data, setting parameters and spectrum data + setting parameters.
Display	
Display	5.7 inches and color LCD
Backlight	LED backlight
Number of dots	640(H) \times 480(V) dots
Power supply	
Kind of power supply	External DC source (by dedicated AC adaptor MA400) and Lithium-ion battery (by optional MB400)
Dedicated AC adaptor	Input : 100 to 240 VAC Output : 9VDC/2.6A
Lithium-ion battery	7.4V/5000mAh
Charge function	Capable of charging during power-off. Indicates 4 conditions with two colors LED (red and green).
Remainder indication	5 levels indication

Other

Operating temperature	0 to 50 $^{\circ}\text{C}$ (guaranteed at 23 \pm 10 $^{\circ}\text{C}$ but at 23 \pm 5 $^{\circ}\text{C}$ as to items with $\times 1$, without carrying case)
Operating humidity	less than 40 $^{\circ}\text{C}/80\%\text{RH}$ (guaranteed at less than 33 $^{\circ}\text{C}/70\%\text{RH}$ but at less than 28 $^{\circ}\text{C}/70\%\text{RH}$ as to items with $\times 1$, without carrying case)
Storage temperature	-20 to 60 $^{\circ}\text{C}$, less than 60 $^{\circ}\text{C}/70\%\text{RH}$
Dimensions	162(W) \times 71(H) \times 265(D)mm (excluding projections, protection bumper and stand)
Weight	approx. 1.8kg (including battery)
Standard accessories	• AC adaptor MA400 • Carrying case • Accessory pouch • Operation manual

Scientech Technologies Pvt. Ltd.

94, Electronic Complex, Pardesipura, Indore- 452 010 India,

☎ +91-731- 4211100, ✉ info@scientech.bz, 🌐 www.ScientechWorld.com

 Scientech