

**TDM-PAM Transmitter and Receiver Sciencetech 2152** is a communication system where the message signal is modulated using Pulse Amplitude Modulation and multiple access is provided using Time Division Multiplexing. The message information is encoded in the amplitude of a series of signal pulses and transmitted using Time Division Multiplexing (i.e. in different time slots).

The Trainer demonstrates following modes of operation between transmitter and receiver -

Mode 1: 3 signals communication (Clock /Sync/ Modulated Signals)

Mode 2: 2 signals communication (Sync/Modulated signals); Clock is recovered at receiver.

Mode 3: 1 signal communication (Modulated signal); Clock and Sync are recovered at receiver

### Features

- Crystal controlled clock
- On-board synchronized analog Signal Generator (DC and Sine wave)
- Demonstrates sampling and reconstructed as per Nyquist criterion
- Four switch selectable sampling frequencies
- Sampling pulse duty-cycle selectable
- On-board Pulse Generator
- Four analog input channels to demonstrate TDM-PAM
- Generation of clock at receiver by PLL
- Fourth order Butterworth Low Pass Filter

## Scope of Learning

- Pulse Amplitude Modulation technique
- Time Division Multiplexing and Demultiplexing
- PLL as Frequency Multiplier to generate clock from sync signal
- Three modes of operation between transmitter and receiver (3 signals/ 2 signals/ 1 signal communication)
- Effect of varying duty cycle of sampling pulse on signal reconstruction
- Effect of different sampling frequencies on TDM-PAM & demodulation technique


## Technical Specifications

<b>Crystal Frequency</b>	: 8 MHz
<b>Analog Input Channels</b>	: 4 channels
<b>Multiplexing</b>	: Time Division Multiplexing
<b>Modulation</b>	: Pulse Amplitude Modulation
<b>On Board Analog Signal</b>	: 500 Hz, 1 KHz, 2 KHz and 4 KHz (Sine wave synchronized to sampling pulse) Adjustable amplitude and separate variable DC level)
<b>Sampling Rate</b>	: Four sampling signals 32, 40, 50 & 80 KHz/ channel (switch selectable)
<b>Sampling Pulse</b>	: With duty cycle variable from 0-90% in decade steps.
<b>Clock Regen. at Receiver</b>	: Using PLL
<b>Test points</b>	: 55 nos.
<b>Interconnections</b>	: 2 mm Sockets
<b>Mains Supply</b>	: 110-220V, 50Hz/60 Hz
<b>Dimensions (mm)</b>	: W 326 x D 252 x H 52
<b>Weight</b>	: 2.5 Kg (approximately)
<b>Operating Conditions</b>	: 0-40°C, 85% RH
<b>Included Accessories</b>	: 2mm Patch cord 16"-10 nos. Mains cord - 1 no.

**Simtel 11** - Digital Communication Interactive Software (optional)

## Topics

- Source: Signal Source, Pulse Generator, Data Generator, Delay
- Math Operations: Adder, Subtractor, Multiplier
- Natural and Flattop Sampling
- Line Encoding and Decoding
- Delta Modulator and Demodulator
- Adaptive Modulator and Demodulator

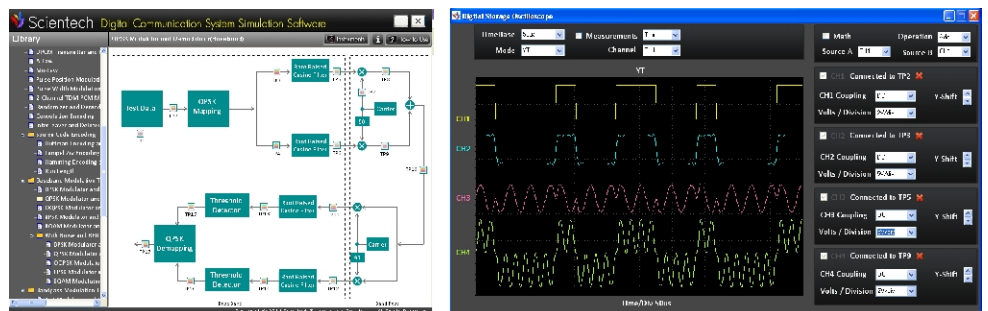

For more details refer Simtel 11 Catalog

Designed and Manufactured in India by -

**Scientech Technologies Pvt. Ltd.**

94, Electronic Complex, Pardesipura, Indore-452010, India.

© +91-731-4211100, ✉ info@scientech.bz, 🌐 www.ScientechWorld.com, Helpline : +91 9893270301