

Artificial Intelligence-Based Autonomous Driving Service Robot Training Equipment

AIoT SerBot II



SerBot II



- AI application practice equipment based on indoor service robot platform
- NVIDIA high-performance on-device AI platform is adopted for Brain board
- Touch display and high-resolution wide-angle camera for GUI-based user interface and deep learning are provided
- Gigabit Ethernet, dual-band Wi-Fi, and Bluetooth are provided
- Voice recognition and audio playback through digital microphone and speaker are possible
- Various IoT sensor modules through 4 dedicated expansion interfaces are supported
- The driving part adopts a 3-axis omni wheel to maximize the robot's movement efficiency and minimize the turning radius
- For precise control of the driving part, controller equipped with a high-performance MCU controls omni wheel motor, encoder and sensor
- Connected via highly reliable CAN FD communication for collaboration between brain board and controller
- Built-in power path management circuit to make it possible to continue practicing even while the battery is charging
- Service robot development is supported through ROS2, robot standard middleware
- High-level Pop libraries enabling to focus on application implementation is provided
- CUDA-based PyTorch and Tensorflow artificial intelligence framework are supported
- Web browser-based Google block coding platform (Blockly) is supported
- Pre-set integrated development environment based on Visual Studio Code for professional application development is supported
- Deep learning-based service robot learning contents are provided
- On-device AI self-driving car training equipment

Operating Program

List	Specifications	
Linux OS	Desktop	X-Server, Openbox, LightDM, Tint2, blueman, network-manager, conky
	CLI	Zsh, Oh-My-Zsh with powerlevel9k thema and nerd fonts, Tmux, fzf, bat, lsd
	Tool Chain	Python3, NodeJS, Java, Clang, GCC, LLVM
	IDE	Visual Studio Code, Jupyter Lab, NeoVim
	Connectivity	Remote Desktop Server with NoMachine, MQTT Broker with mosquitto, Jupyter Lab Server Bluez, paho-mqtt
	Multimedia	portaudio, sox, OpenCV, Google Assistant
	Data Science & AI	Python3, Numpy, Matplotlib, sympy, Pandas, Seaborn, Scipy, Gym, Scikit-learn, Tensorflow, Keras
Middleware	ROS2	Rviz2, RQt, ament, RTPS, Fast DDS, TF2
Pop Library	Output Object	Led, Laser, Buzzer, Relay, RGBLed, DCMotor, StepMotor, OLed, PiezoBuzzer, PixelDisplay, TextLCD, FND, Led Bar
	Input Object	Switch, Touch, Reed, LimitSwitch, Mercury, Knock, Tilt, Opto, Pir, Flame LineTrace, TempHumi, UltraSonic, Shock, Sound, Potentiometer, Cds, SoilMoisture, Thermistor, Temperature, Gas, Dust, Psd, Gesture
	Multimedia	AudioPlay, AudioPlaylist, AudioRecord, Tone, SoundMeter
	Voice Assistant	GAssistant, create_conversation_stream
	AI	Linear Regression, Logistic Regression, Perceptron, ANN, DNN, CNN, DQN

Hardware Specification

List	Specifications							
Body	Size	290x290x310mm	Weight	5.2Kg(About)	Battery	14.8V/7000mA 2ea	Wheels	3 Wheels
	Motor: 3ea	RPM 500, Encoder	Gear Rate	1:30	Max Speed	1.5m/s		
	UltraSonic Sensor 6ea	Effectual Angle < 15° Measuring Angle : 30°	Ranging Distance	: 2cm ~ 400cm	Resolution	: 0.3cm		
	PSD 3ea	Effectual Angle < 15° Measuring Angle : 30°	Ranging Distance	: 2cm ~ 400cm	Resolution	: 0.3cm		
			Trigger Input Pulse width	: 10us				
Brain Module (Default)	CPU	Quad-core ARM Cortex-A57 MPCore processor						
	GPU	NVIDIA Maxwell architecture with 128 NVIDIA CUDA@ cores						
	Memory	4 GB 64-bit LPDDR4, 1600MHz 25.6 GB/s	Storage	MicroSD 64GB				
	Video Encoder	4Kp30 4x 1080p30 9x 720p30 (H.264/H.265)						
	Video Decoder	4Kp60 2x 4Kp30 8x 1080p30 18x 720p30 (H.264/H.265)				Camera	MIPI CSI-2 lanes	
	Connectivity	Dual Band Wireless WiFi 2GHz/5GHz Band, 867Mbps, 802.11ac			Bluetooth 4.2	1x Gigabit Ethernet		
	Connector	1x HDMI 4x USB 3.0 Type-A, 1x Micro-USB (device mode)						

Software Specification

List	Specifications
Brain Module (Option 1)	CPU 6-core ARM v8.2 64-bit 6MB L2 + 4MB L3 Max Freq: 6-core@1900MHz
	GPU 384-core NVIDIA Volta™ GPU with 48 Tensor Cores Max Freq: 1100MHz
	Memory 8 GB 128-bit LPDDR4x 59.7GB/s Storage 16GB eMMC 5.1, NVMe 256GB SSD 1ea(M.2)
	Video Encoder 2x 4K60 4x 4K30 10x 1080p60 22x 1080p30 H.265
	Video Decoder 2x 8K30 6x 4K60 12x 4K30 22x 1080p60 H.265
	Connector 1x HDMI 4x USB 3.0 Type-A, 1x Micro-USB (device mode)
Brain Module (Option 2)	CPU 8-core Arm® Cortex®-A78AE v8.2 64-bit CPU 2MB L2 + 4MB L3
	GPU NVIDIA Ampere architecture with 1024 NVIDIA® CUDA® cores and 32 tensor cores
	Memory 16GB 128-bit LPDDR5 102.4 GB/s Storage NVMe SSD 256GB
	Video Encoder 1x 4K60 3x 4K60 6x 1080p60 12x 1080p30 (H.265) H.264, AV1
	Video Decoder 1x 8K30 2x 4K60 4x 4K30 9x 1080p60 18x 1080p30 (H.265) H.264, VP9, AV1
	Connector 1x HDMI 2.1 4x USB 3.2 Type-A (10Gbps), 1x USB2.0 Type-C (Device Mode)
Top Board	Information Power Voltage Display (3 Digit FND) LED : Low Battery, Normal Battery Piezo : Alarm Low Battery or Booting
	Application Controller Arm® 32-bit Cortex®-M4 CPU with FPU 210 DMIPS 1.25 DMIPS MHz (Dhrystone 2.1), and DSP instructions CAN FD Communication App. Sensor Control IMU Sensor Control Power Check
	CAN FD CAN FD Controller CAN FD Transmitter x 2ea
	IMU Sensor Pitch Roll Yaw (X Y Z axis) Accelerometer + Angular Velocity + Angle +Magnet Field I2C Interface
	CAMERA Image Sensor: Sony IMX219 Resolution : 8M pixel native resolution sensor (3280 x 2464 pixel static images) Video : 1080p30, 720p60 and 640x480p90 Linux intergration: V4L2 driver available Focal length: 3.04 mm Angle of view: 160 degrees Focal ratio (F-Stop): 2.35 Tilt : 0° ~ 100° Tilt
	Microphone High performance Digital Microphone x 4ea Sensitivity : -26 dBFS(Omnidirectional) Acoustic Overload Point : 120dB SPL SNR : 63dB
	Light Sensor Illuminance to digital converter Wide range : 1 ~ 65535(lx) Interface: I2C
	App. Sensor Module Block x 7ea Power: +5V, +3.3V, GND Interface: I2C, ADC, GPIO, SPI
	Power Block Battery Charger Controller Block INFET Low Loss Ideal Diode PowerPath Control Indicator State : DC Adapter, Charging, Complete, Current Limiting +5V, +12V Switching Power Block +3.3V Power Block
	Motor Board
Motor Driver 3ea	Double H bridge drive Drive current 3.4A(MAX single bridge) Direction, PWM Control
TFT LCD	7inch 1024x 600 Interface HDMI Touch Screen Speaker 2ea
Base Components	LiDAR(option1) Distance Range : White object: 12 meters Black object: 10 meters Minimum Operating ranging : 0.2m Angular Range : 0 ~ 360degree Sample Frequency : 16KHz Scan Frequency: 10Hz Angular Resolution : 0.225°
	LiDAR(option2) Both outdoor and indoor environments with reliable resistance to daylight (≥80Klux) Distance Range : White object: 0.05-40 meters (under 70% reflection) Angular Range : 0 ~ 360degree Sample Frequency : 32KHz Scan Frequency: Typ. 10Hz, 10-20Hz Angular Resolution : Typ. 0.1125°, 0.1125°-0.225° Resolution : 10mm
	Switch Module Power : +3.3V, GND Input Device: Tact Switch x 4ea(GPIO 4)
RGB LED Module	Power : +3.3V, GND output device : RGB LED 4ea(GPIO 12)
Analog Module	Power : +3.3V, GND output device : CdS, NTC, VR(Analog 3)
Expansion Module(Option)	TPHG Sensor Module Power : +3.3V, GND I/O Interface : I2C Temperature Measure : -40 ~ 85°C Pressure range : 300 ~ 1100hPa Humidity Measure : 0 ~ 100%r.H. VOC Measure : Ethane, Ethanol, Acetone, Carbon Monoxide, Butadiene, methyl
	Thermopile Sensor Module Power : +3.3V, GND I/O Interface : I2C Factory calibrated in wide temperature range: -40 ~ +125°C for sensor temperature and -70 ~ +380°C for object temperature High accuracy of 0.5°C over wide temperature range (0 ~ +50°C for both Ta and To) High (medical) accuracy calibration Measurement resolution of 0.02°C
	TOF Sensor Module Power : +3.3V, GND I/O Interface : I2C 940nm laser VCSEL Measures absolute range up to 2m Eye Safe : Class 1 laser device compliant with latest standard IEC 60825-1:2014 - 3rd edition
	PGCA Sensor Module Power : +3.3V, GND I/O Interface : I2C, GPIO Proximity Sensing Gesture Detection RGB Color Sensing & Ambient Light Operating Range: 4-8in (10-20cm) White BackLight LED 4ea(GPIO Control)

☉ Training Contents


DDS/RTSPS network-based autonomous vehicle control in ROS2 environment

- WSL2-based Linux development environment
- Understanding Python core syntax for ROS2
- Understanding network programming for ROS2
- ROS2 installation and environment configuration
- Understanding node, topic, service, and parameter action
- ROS2 build environment
- Publisher node and subscriber node
- Services and user defined interface
- Action and multi-node
- Launch and multi-execution
- Advanced ROS2

Deep learning-based autonomous driving technology

- WSL2-based Linux development environment
- Supervised learning and unsupervised learning
- Linear Regression and Logistic Regression
- ANN, DNN, CNN basics
- Understanding machine learning framework
- Fast multidimensional matrix library
- Time series, table data analysis library
- Data visualization library
- Overview of autonomous driving technology
- Basic driving and remote operation
- Avoid collision and move along object
- Transfer learning
- Advanced autonomous driving

☉ Layout

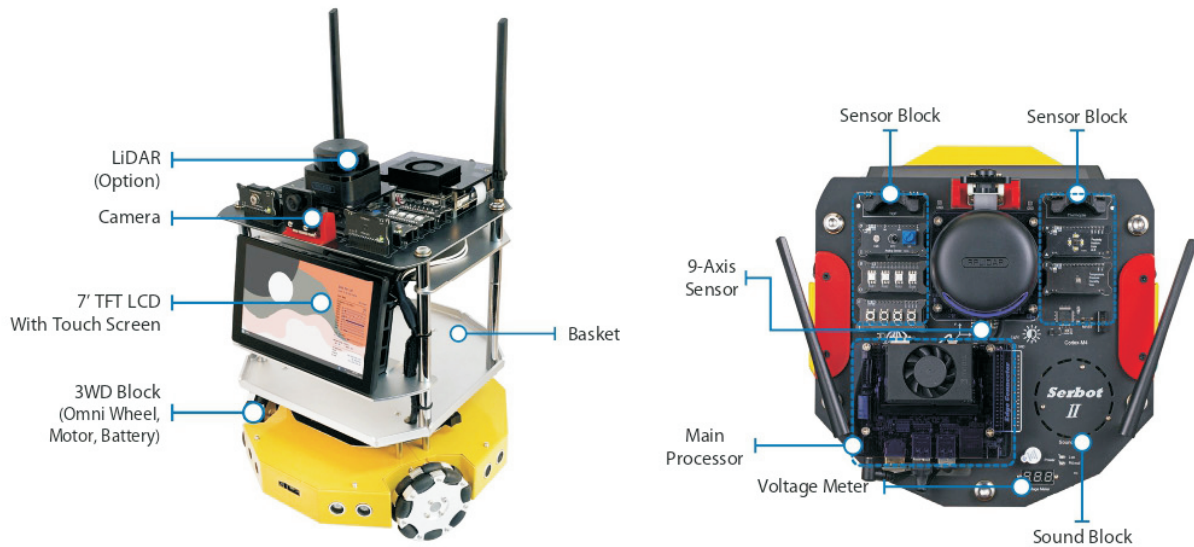

☉ Component



SerBot II



Platform USB
(include OS image and Tools)
1EA



Ethernet Cable
1EA



19V 4.6A DC Adapter
1EA



USB to Ethernet
Adapter
1EA



User Guide book
1EA